

...at the heart of the world's  
pumping requirements



Water Regulations Advisory Service approved product. Certificate No. 0507100

For free technical advice and to order ring

t: +44(0)1274 721314

f: +44(0)1274 730223

e: sales@northern-pumps.co.uk

www.northern-pumps.co.uk

Further downloadable information on the **WonWay** available on the web site.

Head Office:  
Bowling Back Lane,  
Bradford,  
West Yorkshire  
BD4 8SR



Is Your Water System  
Fully Compliant?



WonWay<sup>TM</sup> backflow prevention





We are an established supplier of pumps and pumping systems. Since 1987, we have grown into a successful supplier to the food, hygiene, water and waste water treatment industries. The Offices and Workshop based in West Yorkshire provide all the facilities to assemble and supply our products and services.

## backflow prevention

To protect potable water supplies the NPS Type AB Air Gap Breaktank and Pump assembly provides maximum backflow protection when used with appliances involving;


**Fluid Category 4**, Fluid which represents a significant health hazard because of the concentration of toxic substances, including any fluid which contains -

- a. chemical, carcinogenic substances or pesticides (including insecticides herbicides), or
- b. environmental organisms of potential health significance.

**Fluid Category 5**, Fluid representing a serious health hazard because of the concentration of pathogenic organisms, radioactive or very toxic substances, including any fluid which contains -

- a. faecal material or other human waste;
- b. butchery or other animal waste; or
- c. pathogens from any other source.

Air gap with weir overflow

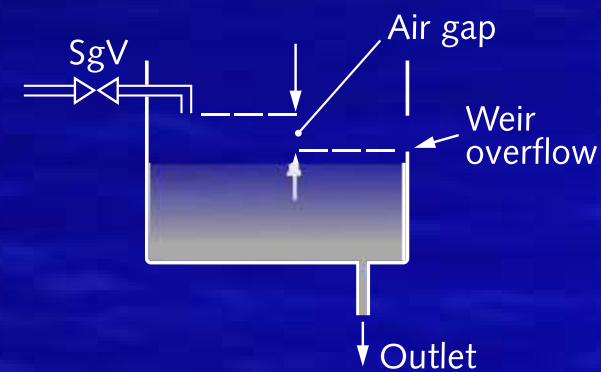

## How the WonWay works

Connecting a fresh water supply to the inlet to the unit admits water to the tank which is controlled by a ball float and valve (as in domestic W.C. flushing) housed in the upper break tank. The combination of the pump and its 'Domino' controller provides a strong flow of water to the chosen destination via the water outlet connection.

Available in tank sizes of 50 litres, 250 litres or 450 litres with a matching pump dependant upon flow rate and pressure required and a command and control unit that is common to all units supplied.

- low cost
- compact
- self contained
- stand alone
- supplied with standard 3 pin plug
- easy connection
- available ex stock
- boosts water pressure

Higher capacity units available on request.

